HITZE

CIEPŁO Z NATURY

KARTA TECHNICZNA


WKŁAD KOMINKOWY HST68x43.RG


PODSTAWOWE INFORMACJE O PRODUKCIE


- Wkład standardowo wyposażony w żeliwny, obracający się o 360° czopuch, umożliwiający odprowadzanie spalin w dowolnym kierunku.
- Palenisko bezrusztowe.
- Szyba decor w standardzie.
- Komora spalania wyłożona akubetem.
- Głębokość wkładu dostosowana do płytkiej zabudowy.
- Regulacja powietrza wtórnego i pierwotnego za pomocą jednej dźwigni.
- Podwójna regulacja wysokości (płynna i skokowa).


PRAWA GILOTYNA POZIOMY WKŁAD KOMINKOWY **HST68x43.RG**

Moc nominalna	13,2 kW
Zakres obciążenia grzewczego	9-17 kW
Sprawność cieplna	79 %
Emisja CO (przy13% O_2)	0,925 g/m³
Emisja pyłków (przy13% O_2)	0,038 g/m³
Maksymalna długość polan	350 mm
Materiał	stal kotłowa 4mm P265GH
Średnica czopucha	160 mm
Średnica dolotu powierza	125 mm
Zalecane pole czynne kratek wylotowych	630-720 cm²
Zalecane pole czynne kratek wlotowych	360-590 cm²
Wymiar szyby w kominku	680x540x295 mm
Waga	205 kg
Rodzaj paliwa	sezonowane drewno drzew liściastych (buk, brzoza, grab) o wilgotności 12-20%

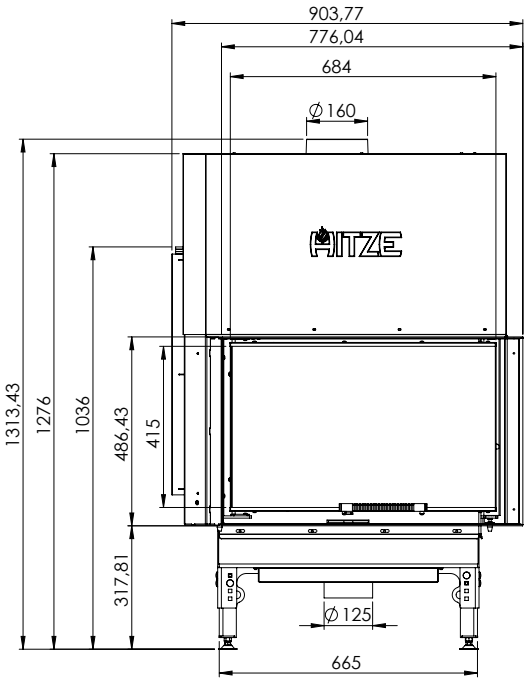

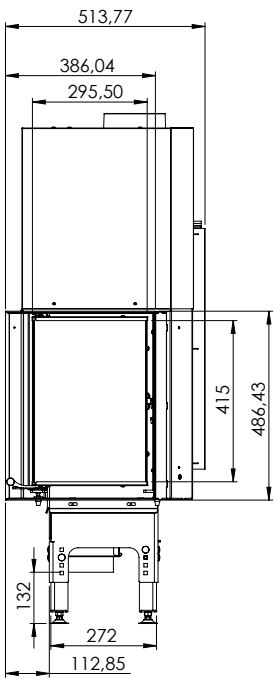

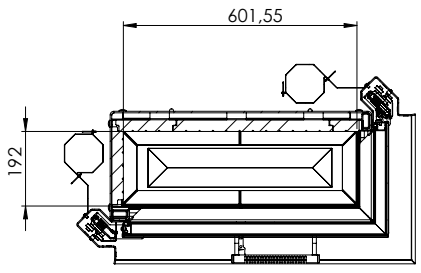

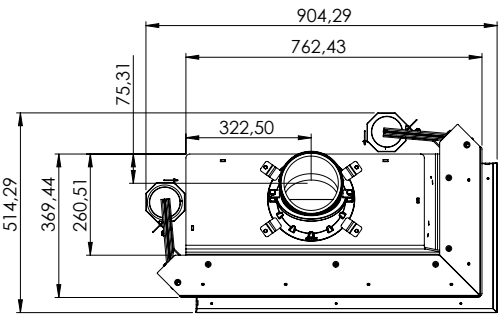

www.hitze.pl

HITZE Sp. z o. o.
ul. Gdyńska 32
26-600 Radom

tel. +48 48 380 18 98
infolinia: 0 800 88 00 30
email: handlowy@hitze.company

NIP 9482603545
REGON 361379132
KRS 0000555859

HITZE

NATURAL HEATING

TECHNICAL CARD


FIREPLACE INSERT HST68x43.RG


PRODUCT INFORMATION


- Cast iron flue that is 360°-regulated allows to evacuate waste in any direction.
- Grateless hearth allows the so-called afterburning on ash.
- Decor glass included provides an attractive exposure of fire.
- Selectable height control allows to adjust fireplace insert height to the installation spot.
- Combustion chamber coated with a special concrete that accumulates warmth, fire-resistant up to 1000°C.
- Depth of device insert adapted to shallow casing.
- Integrated 4-degree throttle regulates primary and secondary air transfer.


RIGHT GUILLOTINE HORIZONTAL FIREPLACE INSERT **HST68x43.RG**

Nominal power	13,2 kW
Heating load range	9-17 kW
Thermal efficiency	79 %
CO emission (with 13% O_2)	0,925 g/m³
Dust emission (with 13% O_2)	0,038 g/m³
Maximum log length	350 mm
Material	boiler steel 4mm P265GH
Draft hood diameter	160 mm
Air intake diameter	125 mm
Active field of outlet vents	630-720 cm²
Active field of inlet vents	360-590 cm²
Size of fireplace glass	680x540x295 mm
Weight	205 kg
Fuel type	12-20% humidity seasoned hardwood (beech, birch, hornbeam)

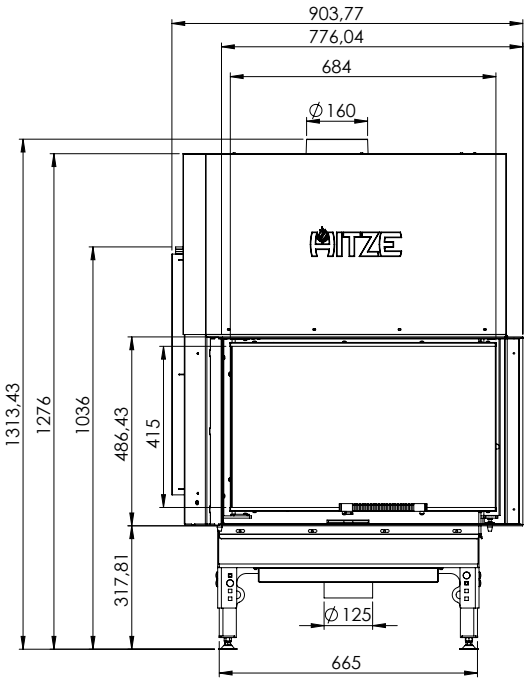

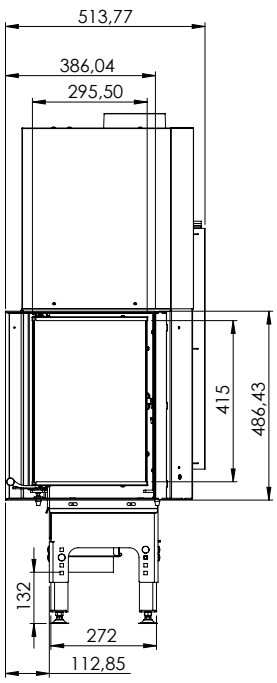

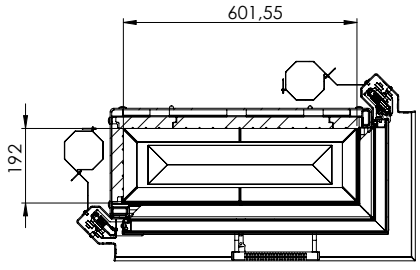

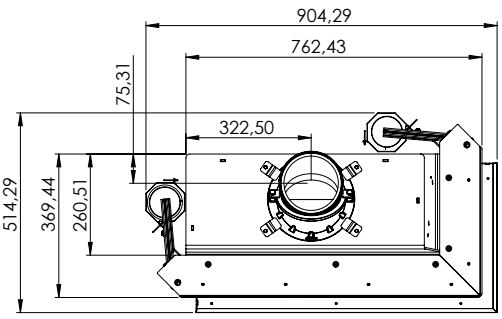

www.hitze.company

Hitze Ltd.
Gdyńska 32 Street
26-600 Radom, POLAND

tel. +48 48 380 18 98
email: export@hitze.company

NIP 9482603545
REGON 361379132
KRS 0000555859